

Track Lighting

Installation Guide

Contents

Safety & General Information **Page - 2**

Installation **Page - 2/3/4**

Product Information **Page - 4**

Recycling and Disposal **Page - 5**

Your Guarantee **Page - 5**

Safety Information

Please read carefully...

- This product is intended for use in domestic or commercial environments such as homes, shops, hotels etc.
- This product should be installed by a qualified installer in accordance with all applicable local regulations and connected to an electrical output in good condition.
- Ensure the power is switched off at the mains before installation.
- This product is not intended for use in a corrosive, damp or explosive atmosphere (dust, vapor, water or gas)
- This product can only be installed outside zones 1 and 2 when installing in a bathroom.
- Do not attempt to power any other type of electrical item by inserting into the track.
- The luminaires used with the track contain no user serviceable parts, never dismantle the products as this will invalidate the warranty and could lead to injury.
- This product should be installed by a qualified installer in accordance with all applicable local regulations and connected to an electrical output in good condition.
- Do not throw away packaging until you have located and confirmed that you have all included parts.

General Information


- Do not throw away packaging until you have located and confirmed that you have all included parts and the product is in good condition.
- Check the products for damage before installation.
- Please read the full manual before installing.

Installation

Tools required for installing:




Track




Remove the connection box from the track by loosening the screw (A). Pull the connector from the track.



The wiring can be fed into the connection box by either feeding it through the end of the box (D) or by removing the knockout plate on the rear of the box (E).



Remove the fixing screw from the front of the connection box (C) and remove the white cover plate.

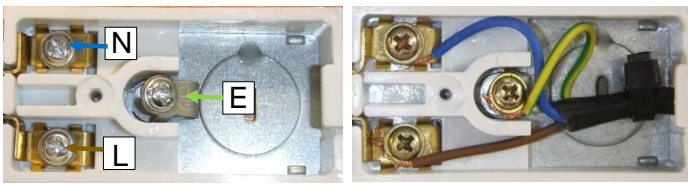


Feed the cable into the track light connector box and connect as shown, replace the cover.


Mapping out the track design:

Before mapping out your track remember that the connection box will act as the starting point. Using a tape measure and framing square, map out the lines the track will follow.

1 Metre Track = 2 holes

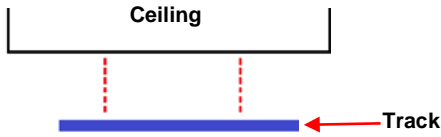

Mark out and drill the required fixing holes and insert suitable fixings into the ceiling. Secure the track to the ceiling, ensuring that all fixing screws are fully screwed down and cannot cause obstruction within the track.

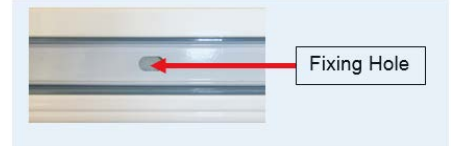

Connectors


Straight Joint



L Joint



T joint



Remove the end cap by loosening the screw (D) and pulling the cap out of the track.



Insert the connector ensuring that the contacts on the connector are correctly aligned with the copper contacts on the inner of the track.



Push the connector into the track.

Lights

TL7



Turn the Luminaire upside down to see the connection on the base. The light has two connections on one side (+ -) and one connection on the other side (earth).



Insert the light into the track so that the base of the luminaire is at a right angle to the track.
Twist the base of the luminaire ensuring the two connections on the light is contacting the with the two connections in the track, turn until the rear catch clicks into place.

TL12




Place the light into the track holding the rear catch open, once the light is fully inserted into the track release the catch so it locks the light onto track.




Push the lever to lock in place ensuring the two copper contacts on the light connector match the two copper contacts in the track.

Product Information

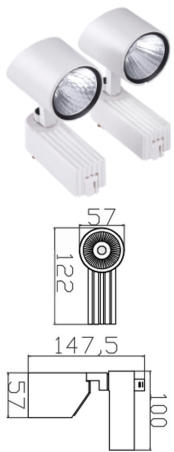





Wattage (w)	7W
Base	Single Circuit
Lifespan	30,000 hours
Lumens	580lm (Natural White), 600lm (Cool White)
Energy Rating	A
Colour	Natural White or Cool White
CRI (Ra>)	>80
Power Factor	>0.9
Input Power	200-240VAC
Beam Angle	24°
Waterproof	IP20
Dimensions	122 x 57 x 147.5mm
Non Dimmable	Non-Dimmable
Weight	1.45kg
Certification	CE, RoHS, LVD & EMC

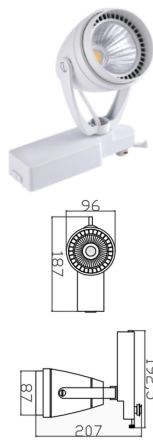

Wattage (w)	12W
Base	Single Circuit
Lifespan	30,000 hours
Lumens	1000lm (Natural White), 1020lm (Cool White)
Energy Rating	A
Colour	Natural or Cool White
CRI (Ra>)	>80
Power Factor	>0.9
Input Power	200-240VAC
Beam Angle	24°
Waterproof	IP20
Dimensions	187 x 96 x 207mm
Non Dimmable	Non-Dimmable
Weight	0.60kg
Certification	CE, RoHS, LVD & EMC



Wattage	10W
Base	LED
Lifespan	40,000h
Lumens	700-740
Energy Rating	A++
IK Rating	N/A
Colour	Cool, Natural or Warm White
CRI	80
Power Factor	0.9
Input Power	AC200-240V
Beam Angle	45°
Waterproof	No
Dimensions	102 x 97.5 x 145mm
Dimmable	Yes
Weight	0.3kg
Certification	CE & RoSH

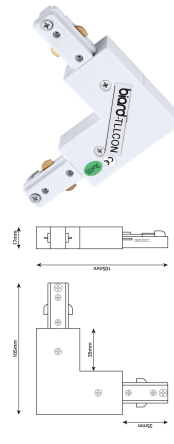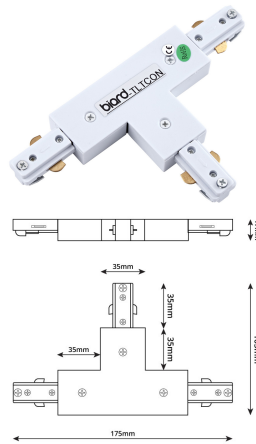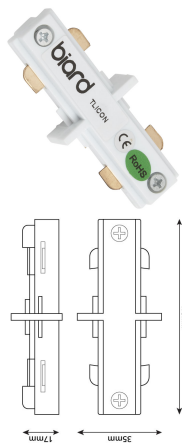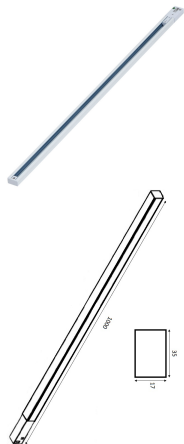

Aftercare

Clean any marks with a soft dry cloth, for stubborn stains please clean with a damp cloth and buff out with a soft cloth. DO NOT use abrasive or acidic cleaners, if you are unsure, please contact us first.

Your Guarantee

- To find the specific guarantee for your product please refer to the website.
- The guarantee starts from the date of purchase.
- The guarantee covers you against issues caused as a result of manufacturing related issues, it does not apply to issues that are found to be a result of poor installation.
- Labour costs for installation of the product are not covered under this warranty.

Recycling and Disposal

The **Waste Electrical and Electronic Equipment Directive (WEEE Directive)** is the **European Community directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE)** which, together with the **RoHS Directive 2002/95/EC**, became European Law in February 2003

The **WEEE** directive aims to reduce the amount of electrical equipment being produced and to encourage everyone to reuse, recycle and recover it.

In support of these guidelines and for environmental safety, do not dispose of any electrical equipment including those marked with the below symbols

When replacing old electrical devices with new ones the retailer is legally obligated to take back your old items for disposal free of charge. You can also recycle your old electrical devices free of charge at your local recycling centre. Please contact your local council for more information.

Please recycle the packaging in accordance with your local government regulations on waste handling and follow the same advice at the end of the products life.

Product - Steel.

Packaging - Cardboard, plastic, steel.



Contact us

Unit 1 & 2 Dawson Ct

Burnley

Lancashire

BB11 5UB