




LED Filament ST64 E27 & B22

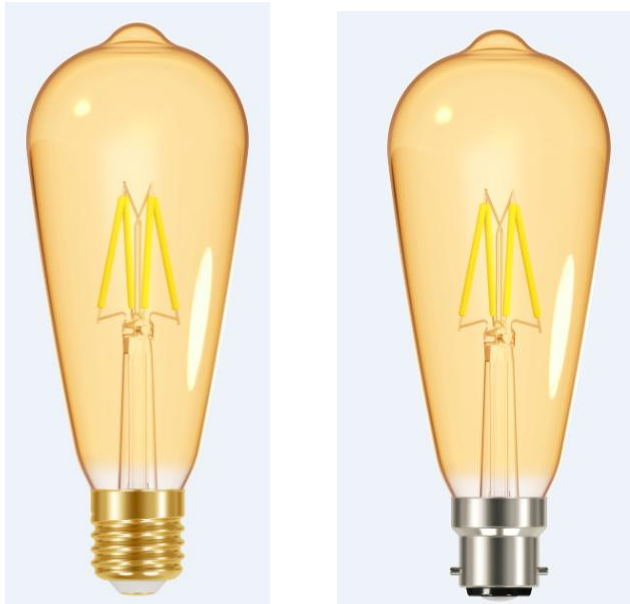

Product Overview

LED retrofit lamps are direct replacements for conventional incandescent, halogen, and compact fluorescent (CFL) lamps.

LEDs deliver higher lumens per watt (lm/W) which means significant energy savings while lasting more than ten times longer than incandescent sources. With their directional light, instant on and ability to dim, LEDs are fast becoming the light source of choice.

Features

- More eco-valued.
- Up to 85% energy saving.

Safety and Maintenance

- Switch off supply before installing or removing lamp.
- Allow to cool before handling.
- Do not use in totally enclosed fittings as this will reduce lamp life.
- Do not dispose of in household waste.
- Dispose of in appropriate section of local civic amenity site or recycling centre.

DATA SHEET

Specifications – E27 & B22 Cap

Lamp Cap	E27	B22
Nominal Power (W)	5.0	5.0
Voltage	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Current (mA)	45	45
Nominal Luminous Flux (lm)	470	470
CCT (K)	2200K Warm white	2200K Warm white
Nominal Lifetime (h)	15000	15000
Dimmable	No	No
Switching Cycles	15000	15000
Warm-up time to 60% (S)	0.10	0.10
Length (mm)	145	145
Diameter (mm)	64	64
Mercury (mg)		
Clean-up instructions	See website	See website
Retrofit	Yes	Yes
Equivalent Wattage (W)	40	40
Rated Power (W)	5.0	5.0
Rated Luminous Flux (lm)	470	470
Rated Lifetime (h)	15000	15000
Power Factor	0.50	0.50
Rated Peak Candelas (cd)	80	80
Lumen Maintenance Factor at		
Nominal Lifetime	15000	15000
CRI	80	80
Start Time (s)	0.10	0.10
Ambient Temperature Range	-20 to 40	-20 to 40

Energy Label – E27 & B22 Cap

Energy Class	A+	A+
Energy Consumption (kWh/1000h)	5.0 (5.0)*	5.0 (5.0)*


* The kWh/1000h value published on the energy label is required to be rounded up to an integer according to the EU implementing directive on Energy Labelling. The value to 2 decimal places is given for reference.

Product Markings – E27 & B22 Cap


Voltage	220-240Vac 50-60Hz	220-240Vac 50-60Hz
Nominal Power (W)	5.0	5.0
Current (mA)	45	45
CE Mark	Yes	Yes
WEEE Mark	Yes	Yes
Batch Code	Yes	Yes

Dimensions

LED Filament ST64 E27 & B22

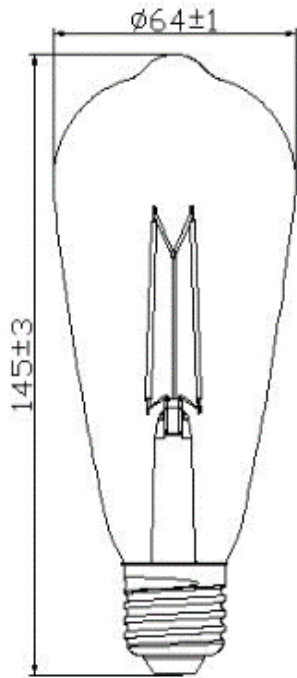

S9433

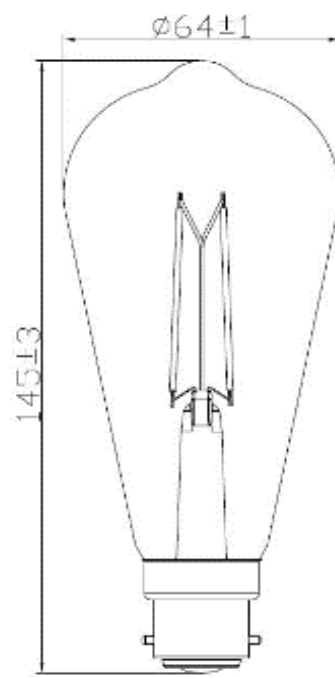

S9432

Photometric Information

2200K

