




Model No. ML753
Waterfall Thermostatic Shower panel


Contents

Packing List Assembly
Technical Data Installation

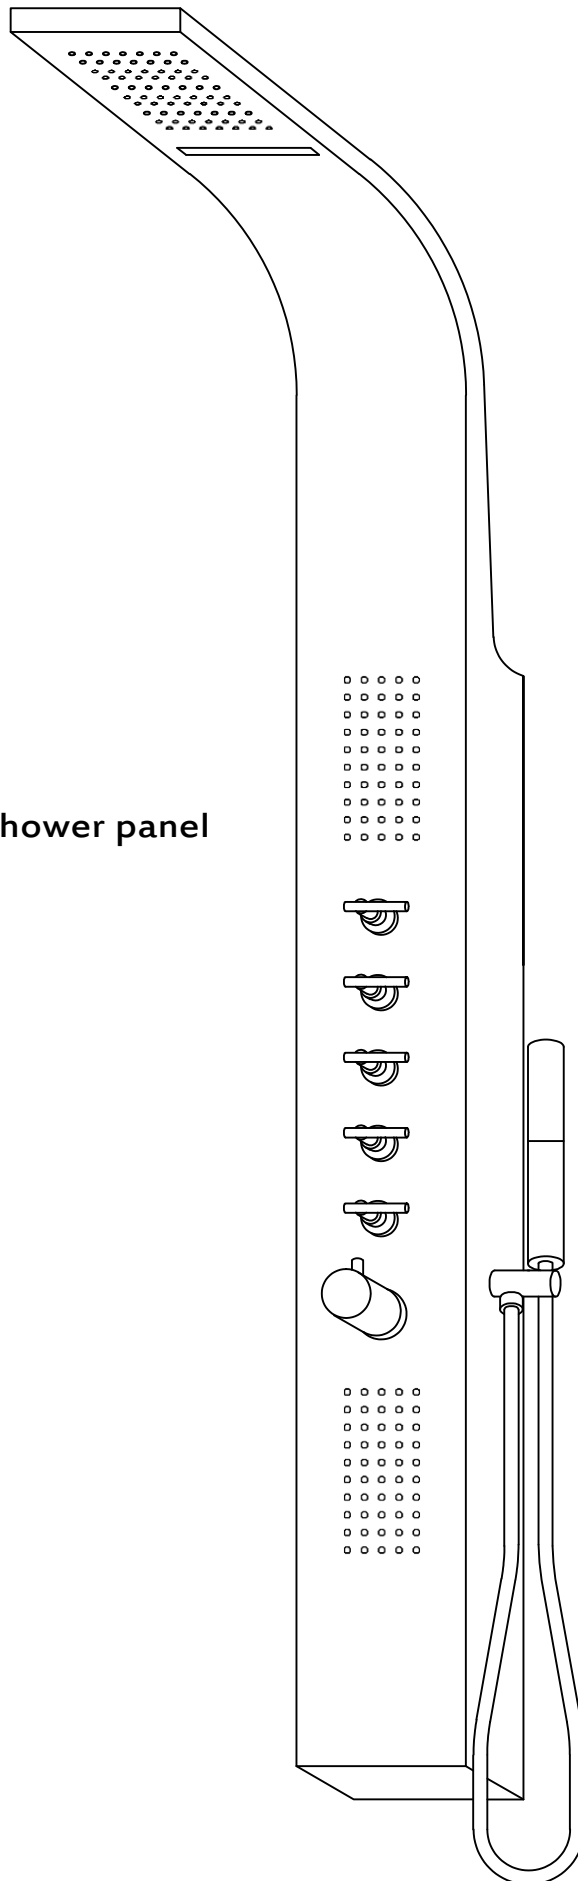


ML753 Waterfall Shower Panel

PARTS LIST

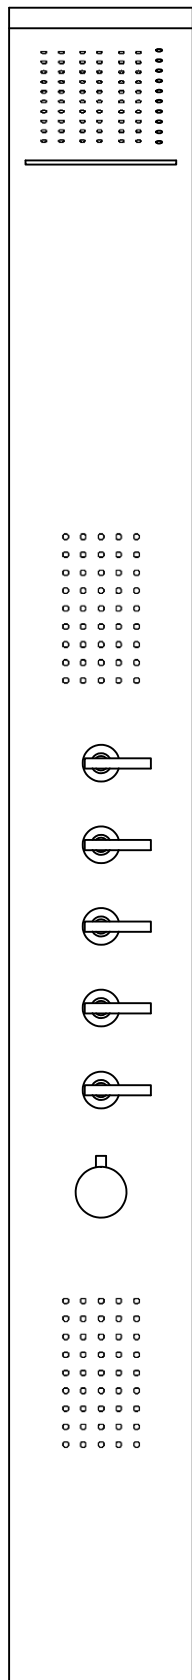


1


- 1. Shower panel
- 2. Handset bracket
- 3. Handset
- 4. Flexible hose
- 5. Wall bracket (2)
- 6. Wall plug (5)
- 7. Screw (5)
- 8. Rubber seal (2)
- 9. 2.0mm Allen key






2

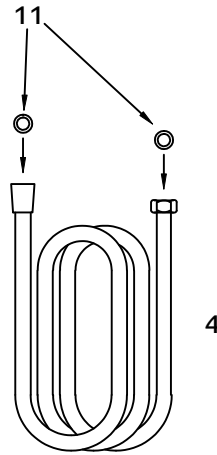

4



3



x2


5




x5



x5









x2




9

TOOLS REQUIRED

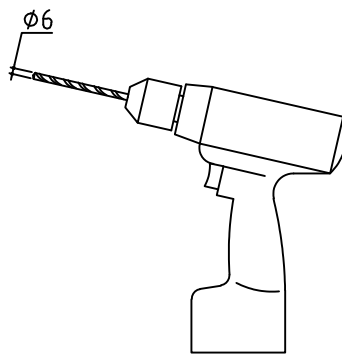

ML753 Waterfall Shower Panel

ASSEMBLY & TECHNICAL DATA

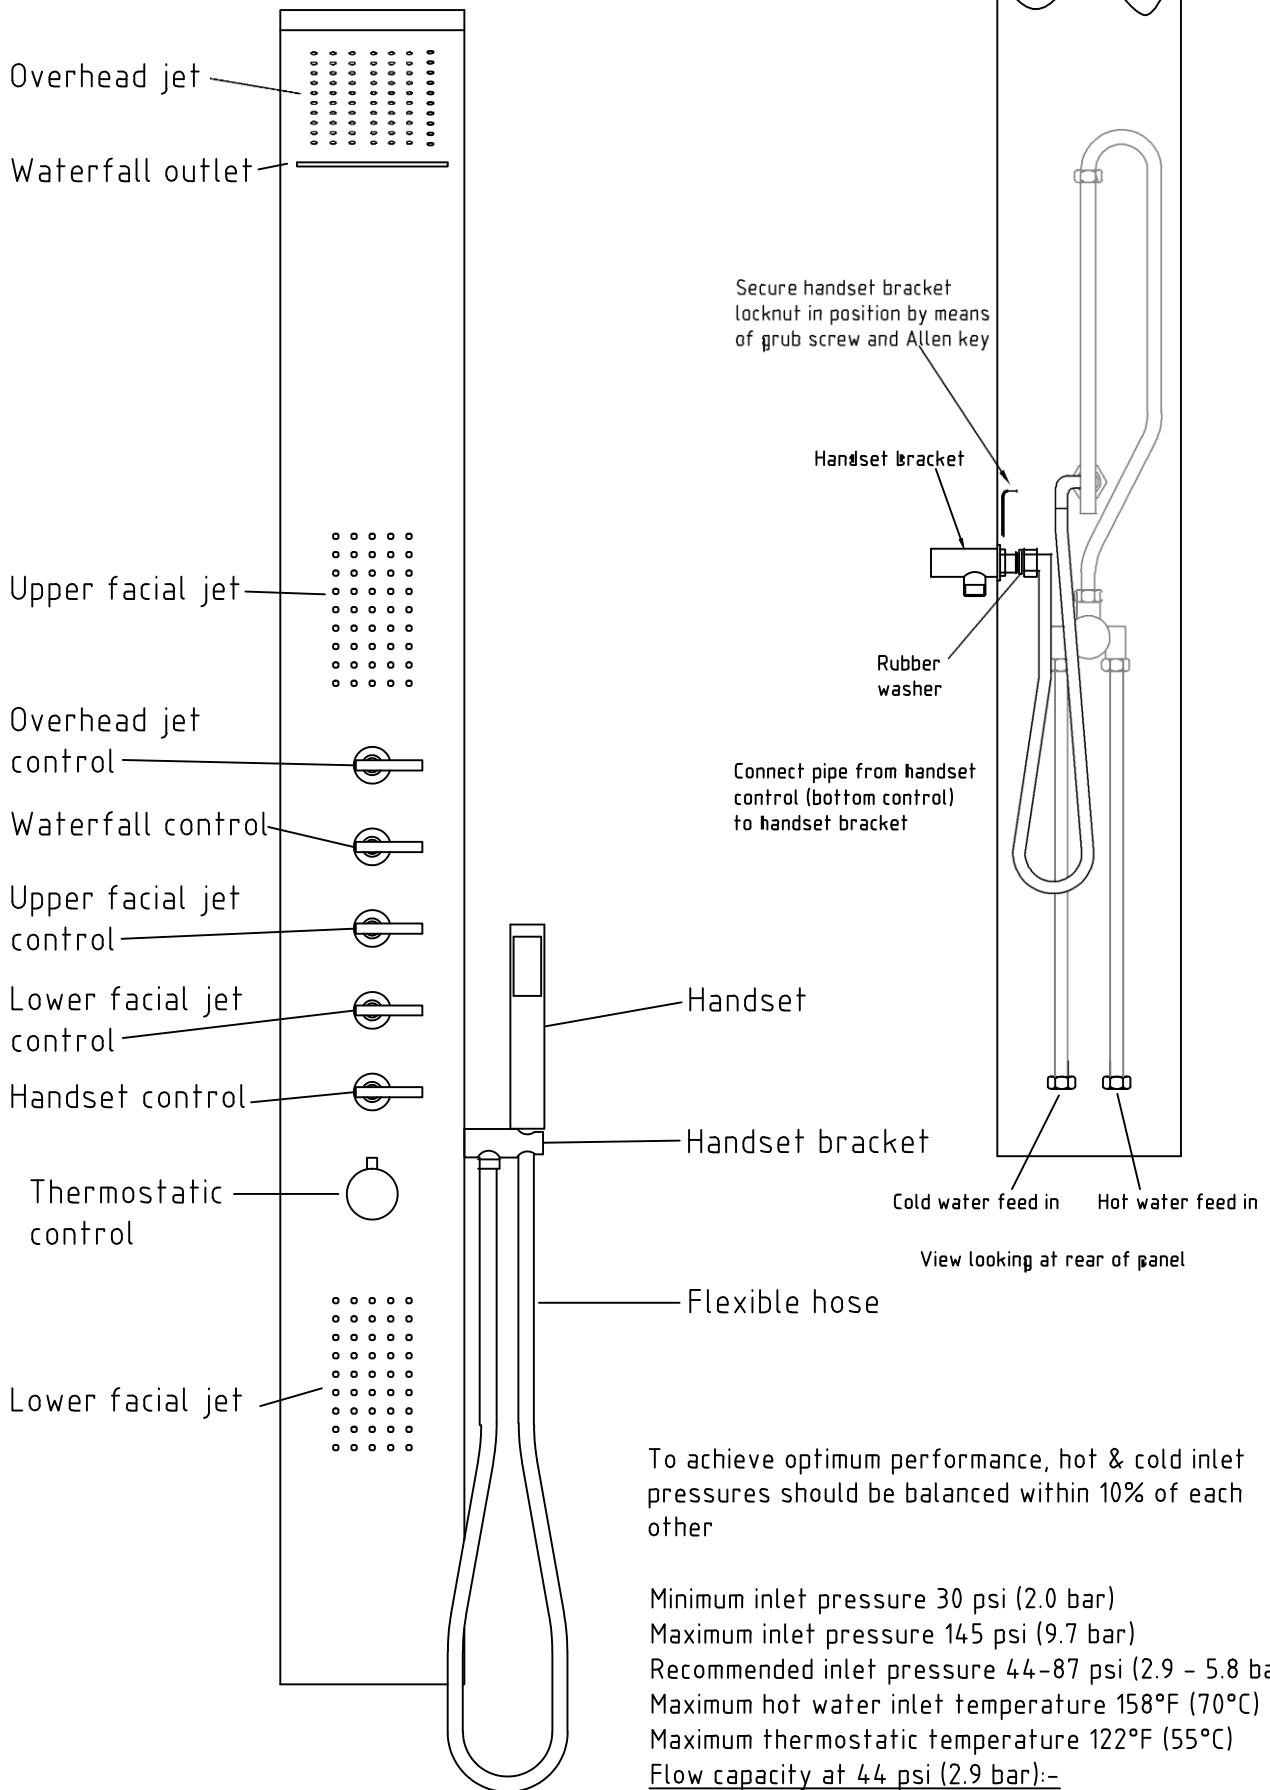


To achieve optimum performance, hot & cold inlet pressures should be balanced within 10% of each other

- Minimum inlet pressure 30 psi (2.0 bar)
- Maximum inlet pressure 145 psi (9.7 bar)
- Recommended inlet pressure 44-87 psi (2.9 - 5.8 bar)
- Maximum hot water inlet temperature 158°F (70°C)
- Maximum thermostatic temperature 122°F (55°C)
- Flow capacity at 44 psi (2.9 bar):-
- Handset 2.9 gpm (13 litre/min)
- Body Jets (6) total 3.4 gpm (15.3 litre/min)
- Showerhead 2.9 gpm (13 liter/min)


ML753 Waterfall Shower Panel

INSTALLATION (1)

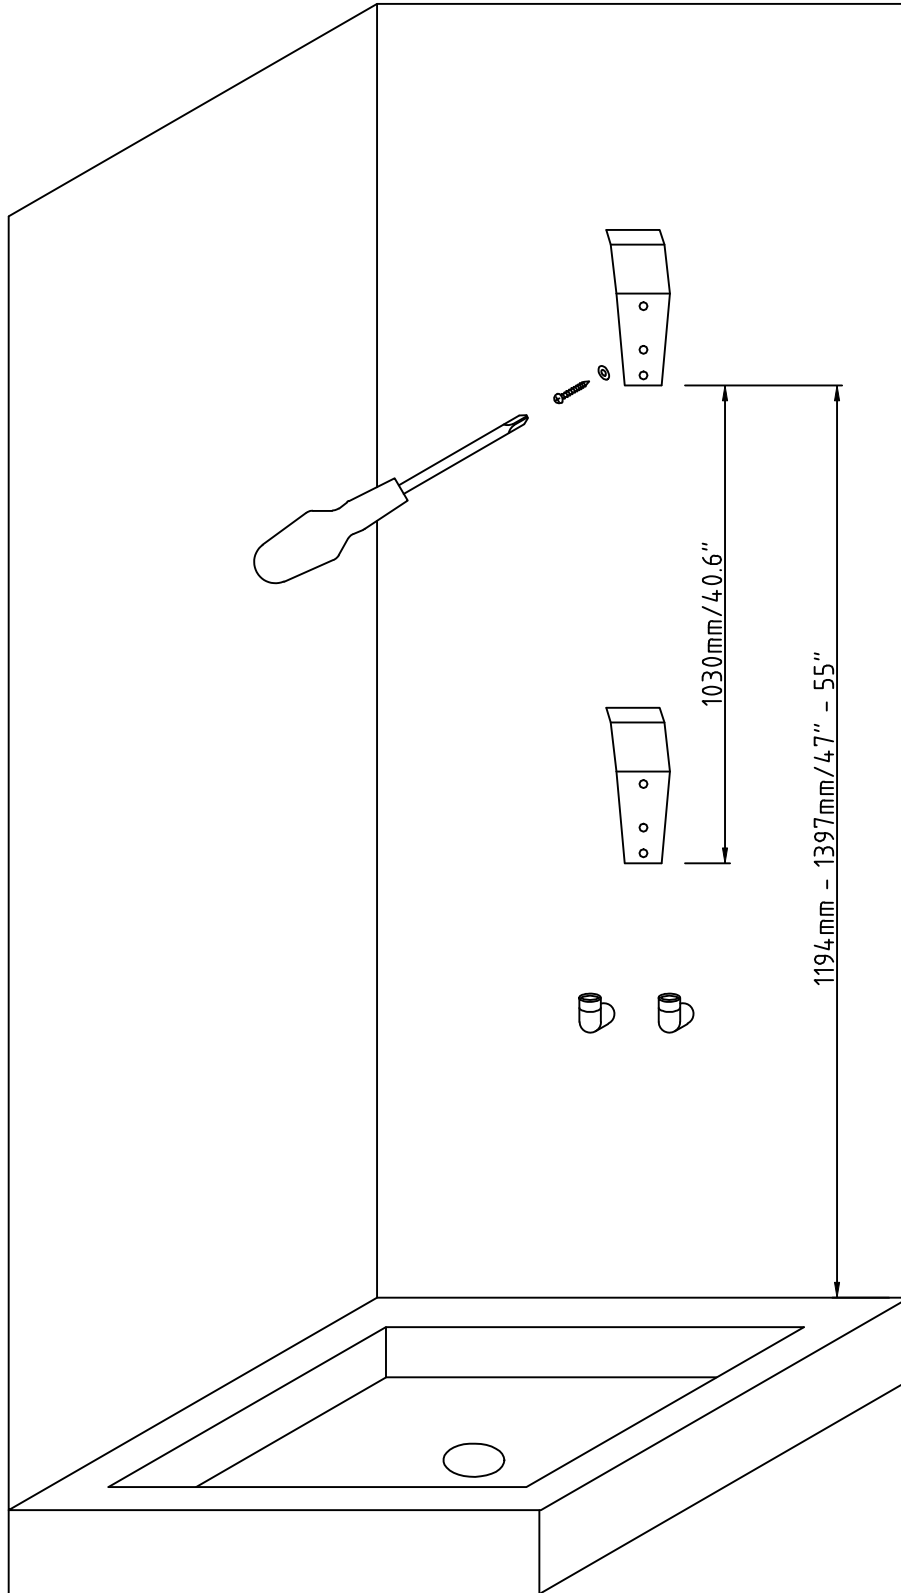

ML753 Waterfall Shower Panel

INSTALLATION (2)

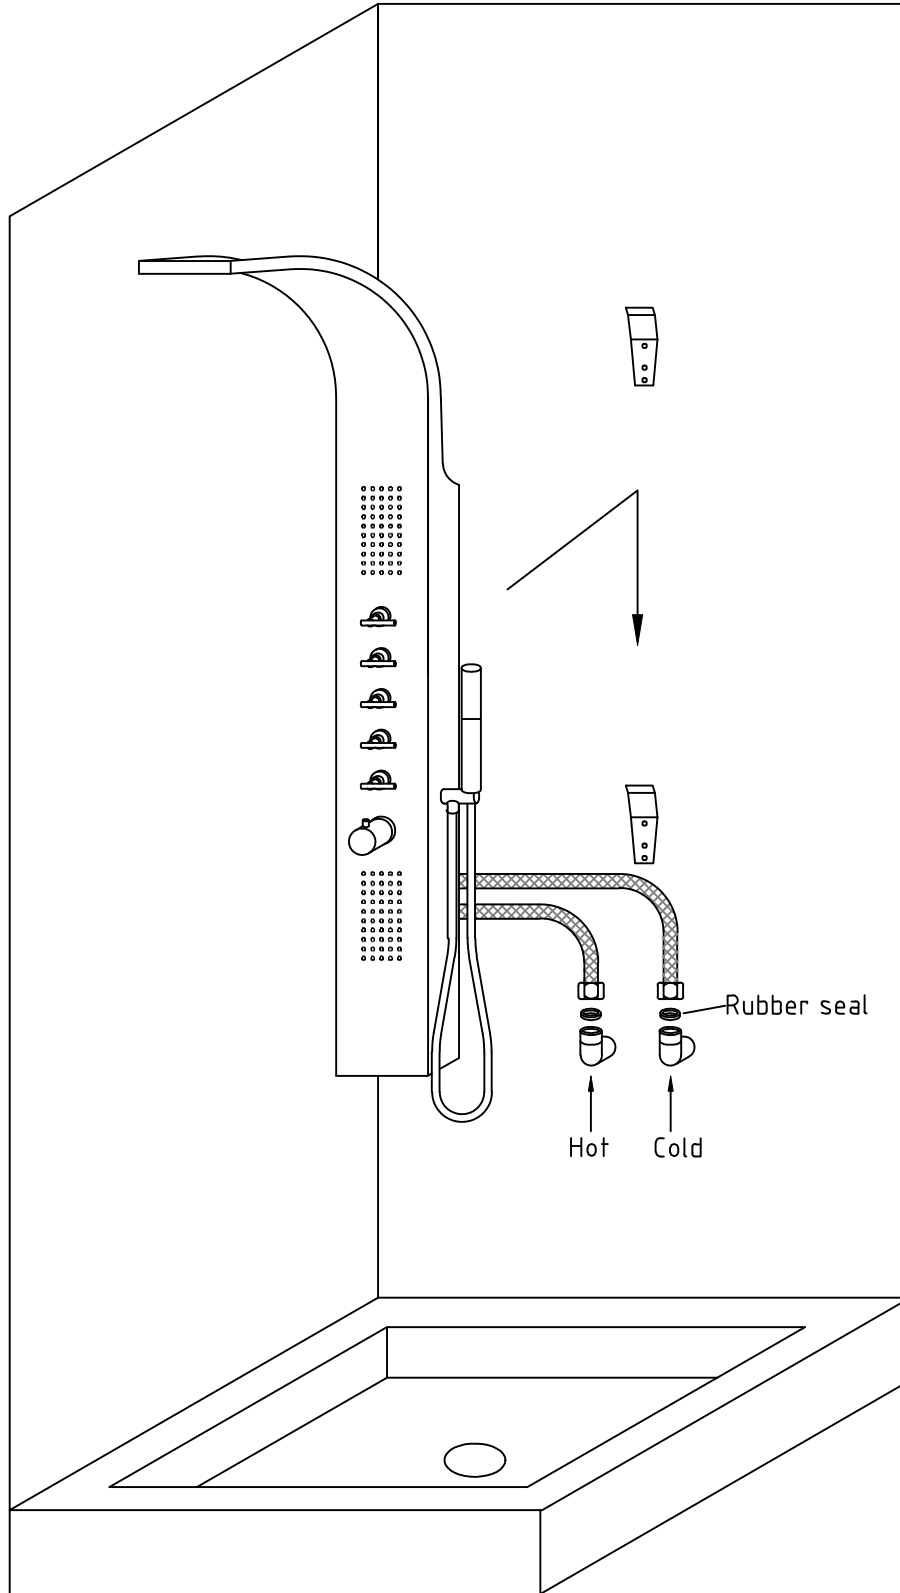

Temperature Setting & Calibration:

Pre-set temperature

The panel temperature is pre-set at 38°C (100°F), but on certain installations the setting may need to be calibrated.

Calibration

Fully turn on the panel water flow.

Note: Ensure the hot water is above 60°C (140°F) and you have more than 2 bar (30 psi) pressure.

Set the temperature control handle at the 38°C position.

Remove the temperature control handle by loosening the fixing screw.

Relocate the temperature control handle approximately 3mm back onto the splined shaft.

Hold in position

If the pre-set temperature is too hot turn the temperature control handle anti-clockwise to obtain the 38°C (100°F). Allow the temperature to stabilise for 10 seconds after each movement.

If the pre-set temperature is too cold turn the temperature control handle clockwise to obtain the 38°C (100°F). Allow the temperature to stabilise for 10 seconds after each movement.

When set at 38°C (100°F) carefully remove the temperature control handle on the splined shaft aligning the 38°C (on the handle) with the line located on the panel.

Secure the temperature control handle with the fixing screw.